

## Eco-V Eco Series Handheld Thermal Camera



The handheld thermal camera is based on the thermal technology, specially designed for the needs of temperature measuring applications. People can quickly troubleshoot faults on-site.

### ▪ Features

- Thermal resolution: 96 x 96 (9,216 pixels)
- 112:1 Distance to spot ratio (D:S)
- SuperIR: 240 x 240 (57,600 pixels)
- NETD : < 50mK (@ 25 °C,F#=1.0)
- Measurement presets: center spot, hot spot, cold spot, off
- 25 Hz image frequency
- Laser pointer
- Built-in 4 GB flash memory: 30,000 pictures
- Up to 8 hours continuous running
- Thermal/Visual/Fusion

## ▪ Specification

Infrared Image	
IR Resolution	96 × 96 (9,216 pixels)
SuperIR	240 × 240 (57,600 pixels)
Distance to Spot Ratio (D:S)	112:1
Image Frequency	25 Hz
NETD	< 50 mK (@ 25 °C, F#=1.0)
Detector Pitch	12 μm
Focal Length	1.35 mm
Spectral Range	7.5 to 14 μm
Field of View (FOV)	50° × 50°
F-number	F1.0
Spatial Resolution (IFOV)	8.89 mrad
Min. Focus Distance	0.1m (0.33 ft)
Focus Mode	Focus Free
Image Display	
Display	240 × 320 Resolution, 2.4"LCD Screen
Image Modes	Thermal/Visual/Fusion
Color Palettes	White Hot, Black Hot, Rainbow, Ironbow, Red Hot,Fusion
Color Alarm	Above alarm, Below Alarm
Visual Camera	640 × 480
Measurement and Analysis	
SuperScene	Water Leak, Insulation
Object Temperature Range	Range -20°C to 150°C (-4°F to 302°F) Range 100°C to 550°C (212°F to 1022°F)
Accuracy	Max (±2°C/3.6°F, ±2%) at ambient temperature 25°C (77°F) and object temperature above 0°C (32°F)
Measurement Tools	Center Spot, Hot Spot, Cold Spot
Level and Span Mode	Auto/Manual
Data Storage and Communication	
Storage Media	Built-in 4G eMMC (user available storage space is less than the nominal capacity)
Image Storage Capacity	Approx. 30,000 Images
General	
USB Interface	USB Type-C
Laser	Yes, Class II
Battery Type	Rechargeable Li-ion battery
Battery Charging Time	Approx. 3 hours fully charged(Adapter Output: 5 V 2 A )
Battery Operating Time	Approx. 8 hours
Protection Level	IP54
Drop Test Height	2 m (6.56 ft)
Working Temperature Range	-10 °C to 50 °C (14 °F to 122 °F)
Storage Temperature Range	-40 °C to 70 °C (-40 °F to 158 °F)
Relative Humidity	< 95% non-condensing
Weight	Approx. 290 g (0.64 lb)


Dimension	196 × 117 × 59 mm (7.7 × 4.6 × 2.3 in)
Tripod Mounting	UNC ¼"-20

▪ **Available Model**

HM-TP30-1AQF-Eco-V  
 HM-TP30G-1AQF-Eco-V

▪ **Dimension**

**Dimensions**

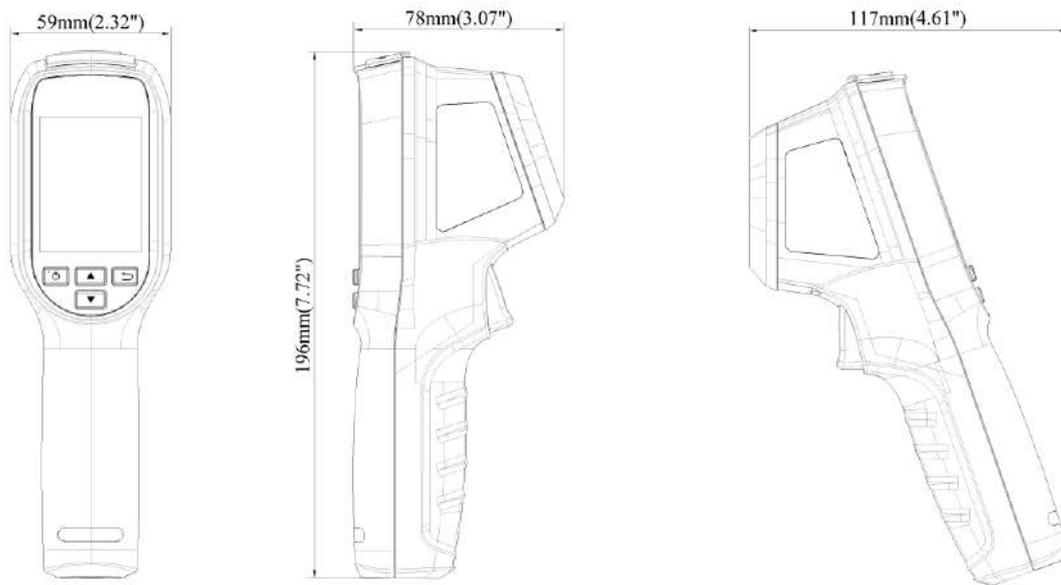


▪ **Packaging List**



**Camera (× 1)**



**QSG (× 1)**



**USB 2.0 A to USB Type-C Cable (× 1)**



**Wrist Strap (× 1)**



**Calibration Certificate (× 1)**

- **Accessory**
- **Optional**

HM-B01-POUCH  
POUCH



▪ **COMPLIANCE NOTICE:**

The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.



 HIKmicro Industrial

 hikmicro\_industrial

 HIKMICRO Industrial

 HIKMICRO

 [info@hikmicrotech.com](mailto:info@hikmicrotech.com)

 [www.hikmicrotech.com](http://www.hikmicrotech.com)

© Hangzhou Microimage Software Co., Ltd. All Rights Reserved.

\*Note: Specifications are subject to change without notice. For the current specs,  
please go to [www.hikmicrotech.com](http://www.hikmicrotech.com)